

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 June 2003 (12.06.2003)

PCT

(10) International Publication Number  
**WO 03/049225 A1**

(51) International Patent Classification<sup>7</sup>: **H01P 5/18**

(21) International Application Number: PCT/US02/36502

(22) International Filing Date:  
13 November 2002 (13.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/055,526 13 November 2001 (13.11.2001) US

(71) Applicant: **GENERAL INSTRUMENT CORPORATION** [US/US]; 101 Tournament Drive, Horsham, PA 19044 (US).

(72) Inventor: **KAUFMAN, David, M.**; 808 Stony Creek Court, Lansdale, PA 19446 (US).

(74) Agent: **WILLIAMS, Karin, L.**; Mayer Fortkort & Williams, PC, 251 North Avenue West, 2nd Floor, Westfield, NJ 07090 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **BANDWIDTH DIRECTIONAL COUPLER**

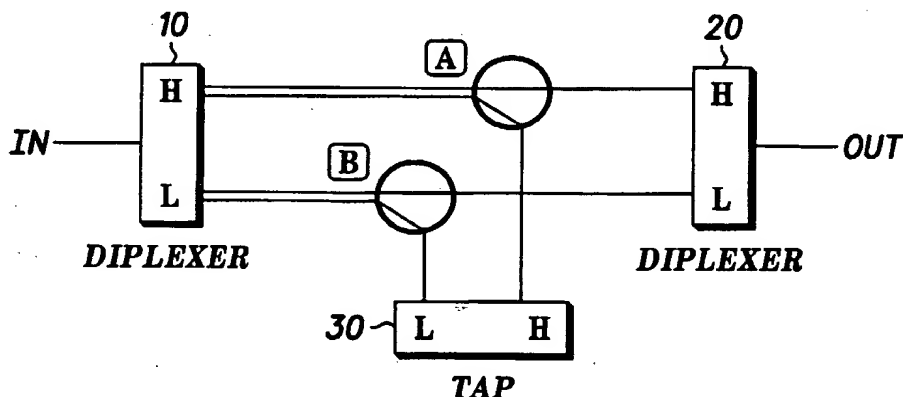

(57) Abstract: A directional coupler system includes an input diplex filter (10) for splitting an input signal into a high band signal and a low band signal, a high band directional coupler (A) for which the high band signal is coupled to an input of the high band directional coupler, a low band directional coupler (B) for which the low band signal is coupled to an input of the low band directional coupler, a tap diplex filter (30) coupled to a tap of each of the high band directional coupler (A) and low band directional coupler (B) and an output diplex filter (20) for receiving and combining a high band signal output from the high band directional coupler (A) and a low band signal output from the low band directional coupler (B). The coupler system improves the bandwidth in a coaxial cable transmission system.

WO 03/049225 A1

Docket: D2551 PCT

## **BANDWIDTH DIRECTIONAL COUPLER**

### **FIELD OF THE INVENTION**

[0001] The present invention relates generally to improving bandwidth in a coaxial cable transmission system, and more particularly, to an improved bandwidth directional coupler.

### **BACKGROUND OF THE INVENTION**

[0002] As illustrated in FIGURE 1, a hybrid Fiber-Coax (HFC) cable television (CATV) system typically employs fiber optics, having an extremely wide bandwidth on the order of 1 GHz, from the headend (or hub) to the nodes (typically covering, for example, 5-7 miles). More specifically, many fiber-optic cables emanate from the headend, and feeds analog sub-networks. At the interface between the fiber and the coax is a fiber/coax node.

[0003] At the fiber/coax node, the fiber transmission medium terminates at a fiber/cable interface and is converted to coaxial cable (typically covering, for example, a mile to the home). The coax will either feed an analog distribution network that first includes a trunk amplifier, or not, if there are enough nodes in the system. As shown, the analog distribution network consists of bridger amplifiers and line extenders in that order, and with varying amounts of cable in between the amplifiers, as system requirements dictate. The line extender, being the final amplifier in the network, drives a series of splitters, followed by directional couplers, known as "taps", which couples to a feeder or drop cable that services the customer premises (usually less than 100 ft to the home).

[0004] The last mile of "coaxial cable", including line extenders, splitters, etc. may

Docket: D2551 PCT

operate up to 1 GHz. However, the amplifiers required typically can not operate at 1 GHz, thereby causing a bottleneck at the node.

[0005] Essentially, the directional coupler (or "tap") is used to couple a fraction of the energy or signal from the main signal line to the load. FIGURE 2 is a schematic illustrating the basic components of a typical directional coupler. As shown, port 1 is the 'input', port 2 the 'output', and port 3 the 'tap' port. The current from port 1 is sampled at transformer T1 and the voltage on port 2 is sampled at transformer T2. Because the secondary current and voltage are in phase, the secondaries of transformers T1 and T2 are combined so that some of the power flowing from port 1 to port 2 is diverted to port 3 (the 'tap'). The performance of the directional coupler is based on the construction of the transformers used in the coupler (the core materials, the dimensions of the transformers, including the length of wire on the windings, etc.). However, the bandwidth spectrum from 5MHz to 1,000 MHz is available from conventional directional coupler technology.

[0006] Various problems arise in attempting to increase the bandwidth of taps by utilizing improved ferrite transformer cores. For example, to obtain good performance at high frequencies, the dimensions of the transformers must remain small compared with a wavelength, i.e. with small, high permeability cores and with fine gauge wire, which however limits the power-handling capability. In addition, the problem of keeping the insertion loss of the coupler small arises especially at the higher range of operation, where the coupler tends to have increased insertion loss due to increased core losses, and leakage inductance. The result is non-flatness over frequency both in the through path as well as in the tap or coupled path. Also, the isolation over frequency degrades, which is important in order to keep reflections low on the cable, which might otherwise cause ghosting on the picture. Finally, a full bandwidth tap needs to have a power passing

Docket: D2551 PCT

choke over the whole range of frequencies, which makes the design of a power passing choke more difficult.

[0007] The present invention is therefore directed to providing a cost-effective improved bandwidth directional coupler that implements a high/low split filter that therefore allows for a power passing choke over only the lower band of operation, thereby making the design of the power passing choke easier and realizable.

#### SUMMARY OF THE INVENTION

[0008] According to the invention, a directional coupler system is introduced having an input diplex filter for splitting an input signal into a high band signal and a low band signal, the high band signal coupled to an input of a high band directional coupler, and the low band signal coupled to an input of a low band directional coupler, a tap diplex filter coupled to a tap of each of the high band directional coupler and low band directional coupler and an output diplex filter receiving and combining a high band signal output from the high band directional coupler and a low band signal output from the low band directional coupler.

[0009] In a number of particular embodiments, the high band directional coupler has a one octave bandwidth, the high band signal is operated from 1200-2400 MHz and the low band signal is operated from 5-1000 MHz.

[0010] The high band directional coupler may utilize stripline or microstrip technology and the low band directional coupler may use ferrite transformer technology.

[0011] In yet a further embodiment, each of the input diplex filter, tap diplex filter and output diplex filter are lumped component bandsplitting filters.

Docket: D2551 PCT

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The above-mentioned and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings, wherein:

[0013] FIGURE 1 depicts the basic elements of a hybrid fiber-coax transport system.

[0014] FIGURE 2 is a schematic illustrating the basic components of a typical directional coupler.

[0015] FIGURE 3 depicts a simplified diagram of an improved bandwidth directional coupler in accordance with the invention.

[0016] FIGURE 4 depicts an amplifier station implementing the band splitting scheme in accordance with the present invention.

[0017] FIGURE 5 depicts an alternate typical amplifier station implementing the band splitting scheme in accordance with the present invention.

#### DETAILED DESCRIPTION

[0018] The basic elements of a proposed bandwidth directional coupler are shown in FIGURE 3. As illustrated, a single directional coupler is constructed from two directional couplers in a band splitting scheme. In a preferred embodiment of the invention, the high band is operated from 1200 –2400 MHz (1 octave bandwidth) and the low band operated from 5-1000 MHz. The low band directional coupler may use conventional ferrite transformer technology capable of up to 1000MHz and the high band directional coupler may use microstrip or stripline technology. In addition, a preferred embodiment of the invention uses lumped component bandsplitting filters, which are desirable from several points of view. First, the alternative to lumped component bandsplitting filters, a

Docket: D2551 PCT

transmission line filter, is not easily realizable at the expected range of operation, 5-1000 MHz (low split) and 1200-2400 MHz (high split). Second, transmission line filters can have re-entrant responses, making them un-useable over broad bands of operation. Re-entrant responses are non-ideal in that the filter loss increases in magnitude where it should be decreasing as frequency goes up.

[0019] As shown in FIGURE 3, a duplex filter 10 receives an input signal that is filtered into high pass and low pass signals. The high pass signal is received at the input of directional coupler A and the low pass signal is received at the input of directional coupler B. Each of the directional couplers' tap legs is output at tap 30. The high band signal is output from at the high output of diplexer 20 and the low band signal at the low output.

[0020] Exemplary amplifier stations are shown in FIGURE 4 and FIGURE 5. The station shown in FIGURE 4 illustrates an amplifier station which utilizes two additional diplexers for the downstream signal, namely, 40 and 70, with two amplifiers between the two diplexers – amplifier 50, for the downstream high band signal and amplifier 60, for the downstream low band signal. One upstream amplifier 80 amplifies the upstream signal (typically 5-42 MHz).

[0021] The station shown in FIGURE 5 illustrates an alternative station that utilizes two additional diplexers, 90 and 100, with two amplifiers between the two diplexers – amplifier 110, for the downstream low band signal, and amplifier 120, for the upstream signal, respectively. The downstream high band signal is amplified through amplifier 130 as shown.

[0022] There are many advantages to operating a feeder or line extender in a

Docket: D2551 PCT

high/low split mode. Specifically, by operating separate high band and low band amplifiers, and operating the high band over one octave of bandwidth only, composite second order products of the high band amplifier are contained out of its band and are eliminated by a filter. This results in improved distortion requirements for the high band amplifier.

[0023] The above describes an approach to improving the bandwidth of a directional coupler for coaxial cable transmission systems without resorting to attempts to improve ferrite transformer cores. The approach uniquely constructs a single directional coupler from two directional couplers in a band splitting scheme and uses well-known technology for the low band directional coupler and microstrip or stripline technology for the high band directional coupler. The individual components are known and widely available. The technique is applicable to any hybrid fiber/coax architecture.

[0024] Although various embodiments are specifically illustrated and described herein, it will be appreciated that modifications and variations of the invention are covered by the above teachings and are within the purview of the appended claims without departing from the spirit and intended scope of the invention. For example, by substituting power splitters for the directional couplers, the invention could be used as a 3dB power splitter as well (power is equally divided between ports 2 and 3, one half of the power appearing on each output – thus, the loss of the splitter from the input port 1 to either output must be  $10\log(1/2)=3.01\text{dB}$ ). Furthermore, this exemplary modification should not be interpreted to limit the modifications and variations of the invention covered by the claims but are merely illustrative of possible variations.

Docket: D2551 PCT

WHAT IS CLAIMED IS:

1. A directional coupler system comprising:
  - an input diplex filter for splitting an input signal into a high band signal and a low band signal;
  - a high band directional coupler, wherein the high band signal is coupled to an input of said high band directional coupler;
  - a low band directional coupler, wherein the low band signal is coupled to an input of said low band directional coupler;
  - a tap diplex filter coupled to a tap of each of said high band directional coupler and said low band directional coupler; and
  - an output diplex filter for receiving and combining a high band signal output from said high band directional coupler and a low band signal output from said low band directional coupler.
2. The coupler system of Claim 1, wherein said high band directional coupler has a one octave bandwidth.
3. The coupler system of Claim 2, wherein the high band signal is operated from 1200-2400 MHz.
4. The coupler system of Claim 2 wherein said high band directional coupler is stripline or microstrip technology.



Docket: D2551 PCT

5. The coupler system of Claim 1 wherein said low band directional coupler is ferrite transformer technology.

6. The coupler system of Claim 1, wherein the low band signal is operated from 5-1000 MHz.

7. The coupler system of Claim 1, wherein each of said input duplex filter, said tap duplex filter and said output duplex filter are lumped component bandsplitting filters.

8. An improved wideband bandwidth directional coupler comprising:  
a first directional coupler;  
a second directional coupler, said first and second couplers arranged in a band splitting scheme;

first splitting means for splitting an input signal into a high band signal and a low band signal, wherein the high band signal is input to said first directional coupler and the low band signal is input to said second directional coupler;

second splitting means for receiving a high band signal output from said first directional coupler and a low band signal output from said second directional coupler;  
and

a tap for receiving a signal from each of a tap port of said first directional coupler and said second directional coupler.

Docket: D2551 PCT

9. The coupler of Claim 8, wherein said first directional coupler has a one octave bandwidth.

10. The coupler system of Claim 9, wherein the high band signal is operated from 1200-2400 MHz.

11. The coupler system of Claim 9 wherein said first directional coupler is stripline or microstrip technology.

12. The coupler system of Claim 8 wherein said second directional coupler is ferrite transformer technology.

13. The coupler system of Claim 8, wherein the low band signal is operated from 5-1000 MHz.

14. The coupler system of Claim 8, wherein each of said first splitting means, second splitting means and tap are lumped component bandsplitting filters.

15. A method for improving the bandwidth of a coaxial cable transmission system by providing an improved bandwidth directional coupler that implements a high/low split filter, the method comprising the steps of:

splitting an input signal into a high band signal and a low band signal;

coupling the high band signal to the input of a high band directional coupler and the low band signal to the input of a low band directional coupler;

Docket: D2551 PCT

coupling a tap diplex filter to a tap of each of the high band directional coupler and the low band directional coupler; and



receiving and combining a high band signal output from the high band directional coupler and a low band signal output from the low band directional coupler.




16. The method of Claim 15, wherein the high band signal is operated from 1200-2400 MHz.

17. The method of Claim 15 wherein the high band directional coupler is stripline or microstrip technology.

18. The method of Claim 15 wherein the low band directional coupler is ferrite transformer technology.

19. The method of Claim 15, wherein the low band signal is operated from 5-1000 MHz.

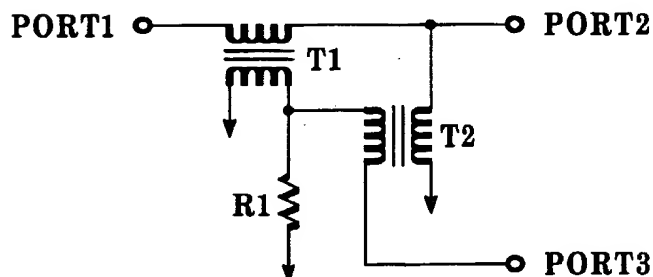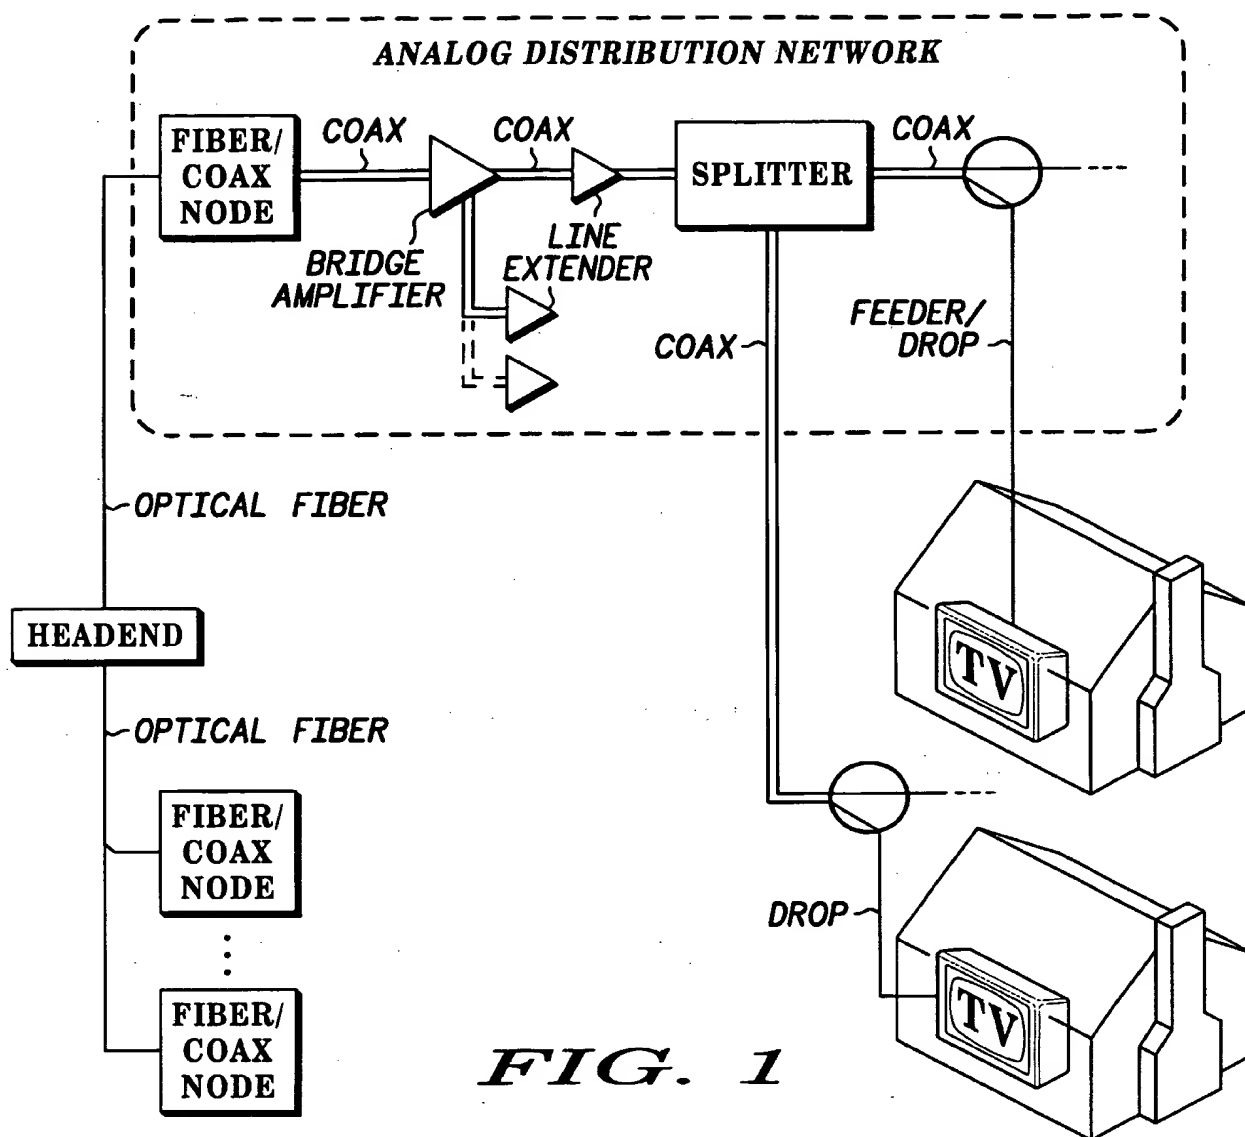

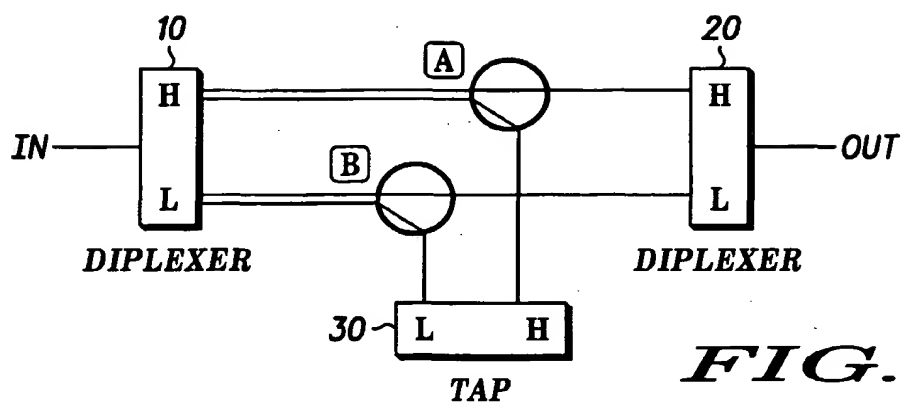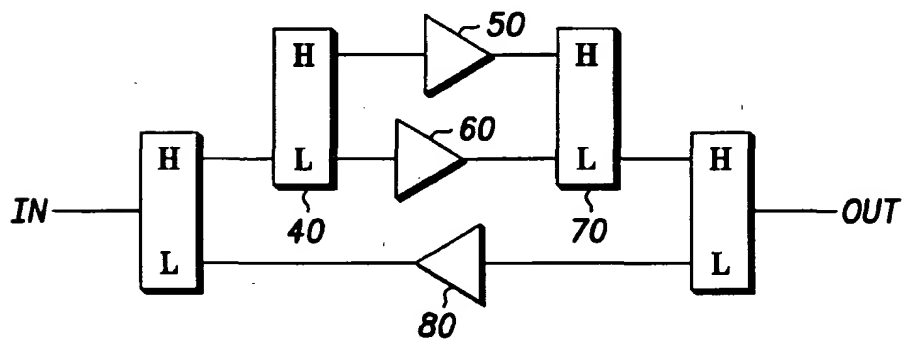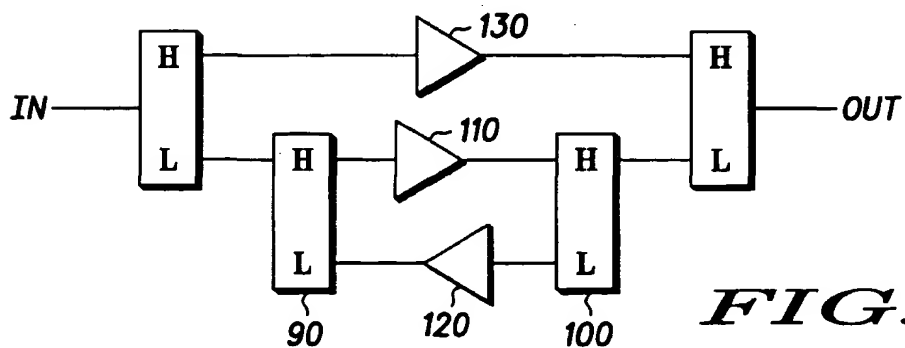**FIG. 3****FIG. 4****FIG. 5**

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/36502

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(7) : H01P 5/18 US CL : 333/109, 110, 116 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 333/109, 110, 112, 116; 455/5.1  Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched EPO, JPO, DERWENT  Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) coupler, splitter, diplexer, catv, highband, lowband		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---	US 5,130,664 A (PAVLIC et al) 14 July 1992 (14.07.1992), Fig. 1 and Fig. 5, spec all.	1, 7, 8, 14, 15
Y		2, 4, 5, 9, 11, 12, 17, 18
X ---	US 5,218,714 A (ISHIBASHI et al) 08 June 1993 (08.06.1993), Fig. 2.	1, 8, 15
Y		2, 4, 5, 7, 9, 11, 12, 14, 17, 18
Y	US 4,817,189 A (PFIZENMAIER et al) 28 March 1989 (28.03.1989), Fig. 1 and Fig. 2, column 3, lines 4-18.	4, 5, 11, 12, 17, 18
Y	US 5,255,318 A (GURUSAMI et al) 19 October 1993 (19.10.1993), Fig. 4.	2, 9
A	US 6,496,708 B1 (CHAN et al) 17 December 2002 (17.12.2002), spec all.	4, 5, 11, 12, 17, 18
A	US 5,999,059 A (BLOUNT, JR et al) 07 December 1999 (07.12.1999), spec all.	1-19
A	US 5,822,677 A (PEYROVIAN) 13 October 1998 (13.10.1998), spec all.	1-19
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 02 January 2003 (02.01.2003)		Date of mailing of the international search report <b>04 APR 2003</b>
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230		Authorized officer Dean O Takaoka Telephone No. (703) 308-0956